



**NORIT**  
ACTIVATED CARBON


Water Treatment Services

**POTABLE WATER**

# The Key to Making Water Potable

## Potable Water

To make water potable, a large number of pollutants may need to be removed. The compounds of concern range from micropollutants like pesticides, detergents and chlorinated solvents to suspended solids and residual oxidants such as ozone. NORIT® Activated Carbon plays a vital role in the removal of all kinds of organics from potable water. Activated carbon, in fact, is the key to making water clean and safe enough to drink. Around the world, in hundreds of cities and companies, our products are used by water professionals.

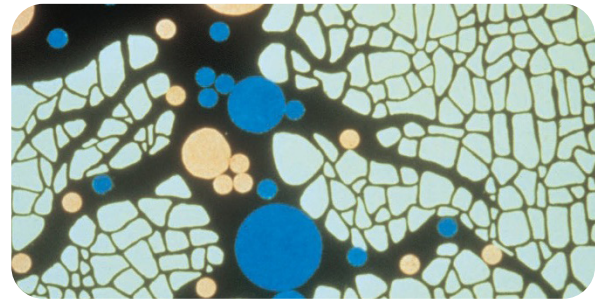

## Activated Carbon

Activated carbon is a porous material consisting mainly of elementary carbon modified to have a large internal surface area: typically 500 up to 1500 m<sup>2</sup>/g. Activated carbon is available in two forms:

- Powdered Activated Carbon (PAC): particle size 1-150 µm
- Granular Activated Carbon (GAC): particle size 0.5-4 mm

## How Activated Carbon Works

Due to its large surface area and specific surface chemistry, activated carbon can adsorb large quantities of organic pollutants from water. The compounds are adsorbed into the internal pores. A general rule of thumb to determine the adsorbability is the more hydrophobic (or less soluble in water), the more adsorbable the compound.

# PAC and GAC: What 's the Difference?

PAC stands for Powdered Activated Carbon, and GAC means Granular Activated Carbon. The application of PAC versus GAC differs greatly, both having their own merits in the water treatment process. Around the world NORIT® has references for PAC and GAC applications. For key features of both technologies see the table.

Issue	PAC	GAC
Scope of compounds removed	Taste & odor Organic micropollutants	Taste & odor Organic micropollutants Overall organics (DOC etc.) Biodegradables (BDOC, AOC) Suspended solids Residual oxidants
Typical application	Seasonal or incidental water quality problems	Continuous need for activated carbon treatment
Achievable residual concentration of target compounds	Low	Low/very low
Treatment stage of application	Coagulation/flocculation Filtration (occasionally)	Dedicated adsorbers Converted sandfilters
Regeneration	None (used on one-time only basis)	Thermal reactivation
Systems required	Dosing facilities	Filter vessels GAC transport/handling facilities

# GAC: State-of-the-Art Technology

---

GAC filtration is currently the state-of-the-art technology in many water treatment plants. NORIT® products are often applied as one of the final treatment steps (polishing), either stand-alone or after ozonation. Due to (partial) oxidation of organic matter by ozone, bio-activity in the GAC filter is enhanced, usually resulting in an increased filter service time.

## Treatment Objectives

The major treatment objective for GAC is the removal of dissolved organics, of both low and high molecular weight: taste and odor causing compounds, overall organics (DOC, TOC, KMnO<sub>4</sub> number, UV-abs.), biodegradable organics (AOC, BDOC), pesticides, PFAS, micropollutants, detergents, etc. Additionally, GAC removes suspended solids and residual oxidants (such as ozone).

## Filter Types

Around the world you will find GAC filters using NORIT products. Gravity filters are common, but pressure filters are growing in use. Both dedicated adsorbers and existing (mechanical and/or biological) filters are used:

- **Dedicated adsorbers:** Filters specifically designed for GAC, with empty-bed contact time (EBCT) of 10-20 min.
- **Converted existing filters:** Rapid sandfilters: conversion to GAC or GAC/sand multi-layer results in relatively short EBCT (< 10 min.) Slow sandfilters: GAC put on top or between sand layers (the 'GAC Sandwich'), results in relatively high EBCT (> 30 min.)

## Purity Requirements

NORIT products meet the most stringent requirements concerning purity and leaching behavior. Moreover they comply with the requirements of the US Food Chemicals Codex and the EN 12915 (EU) requirements for leachable metals, PAH and cyanide. Additionally, a number of grades have been certified by NSF (USA) and/or KIWA (NL). Details are available on request.

## GAC Packaging, Handling, and Commissioning

NORIT products are supplied in bags, bulk bags containing 1 or 2 m<sup>3</sup> or in bulk tank cars containing up to 50 m<sup>3</sup>. For handling and commissioning of our products, Technical Bulletins are available.

## Application support

Many water treatment plants rely on support from our application specialists and laboratories for:

- GAC performance/cost optimizations
- GAC handling and GAC filter commissioning
- Analysis of GAC samples

# GAC: Reactivation Services

---

## GAC reactivation - A Sound Solution

When GAC is exhausted, regeneration is generally the best option compared to disposal, from both economical and environmental points of view. Thermal reactivation is state-of-the-art regeneration technology. During heat treatment, adsorbed organics are cracked and gasified using steam. The original pore structure is almost completely restored.

NORIT® provides reactivation services at facilities our facility in Pryor, OK. Reactivated carbon is sold into the industrial wastewater treatment market in North America.



# PAC: Low Investment Costs

PAC is widely used in potable water treatment for removal of taste, odor, and organic micropollutants, such as pesticides. The major strengths of PAC are:

- **Flexibility:** as the dosage and type are adapted to the actual need (e.g. during emergencies)
- **Low investment costs:** because PAC separation occurs in existing solid separation steps
- High efficiency for specific compounds
- Cost effectiveness

## Treatment objectives and PAC properties

The chemical nature of the target compounds differs greatly. Each of the various compounds requires a dedicated pore structure to provide optimal adsorption. The NORIT® product range is designed to provide a superior match of water treatment requirements and PAC properties (pore structure, particle size, purity).

## Purity requirements

NORIT products meet stringent purity requirements for activated carbon for potable water treatment. Potable water grades comply with the US Food Chemicals Codex and the EN 12903 (EU) requirements for metals, PAH and cyanide. Additionally, a number of grades have been certified by NSF (USA) and/or KIWA (NL). Details are available on request.

## AC packaging, handling and dosing

NORIT products are supplied in paper bags, bulk bags or in bulk tank cars. If PAC is dosed manually, e.g. in the event of small scale operations, modified PAC products are available:

- **Water dispersible PAC granules:** 3 mm diameter pellets which disperse on contact with water
- **Wetted PAC:** At typically 50 mass percent moisture level, the PAC behaves dust-free

## PAC performance assessment

The water to be treated, process conditions, and treatment targets determine the optimal PAC grade and dosage level. Lab scale batch trials with the actual water to be treated usually give a good indication of full scale PAC performance. This yields the major performance criterion: the dosage required to achieve the target residual concentration of impurities.

NORIT application specialists are available to share their extensive experience in the field of potable water treatment.

## PAC SEPARATION TECHNOLOGIES

### Floc separation

In its conventional application, PAC is dosed ahead of, or into, the coagulation/flocculation stage. The PAC is incorporated in the flocs, thus being separated simultaneously with the flocs. Net contact time in the floc system amounts to 0.5 – 2 h or longer, depending on the separation system.

### Ultrafiltration (UF)

In this process, PAC is dosed upstream of the UF system - the PAC being separated from the water by UF membranes. Between successive backwashings, the PAC level in the system gradually increases in case of crossflow filtration. PAC residence time is up to 1 h, depending on the time interval between two backwashings.

### Rapid sand filters (RSFs)

PAC is dosed ahead of the RSF and is separated during the filtration process, possibly with the aid of a flocculant. The net contact time can be considered from two different points of view:

- **Hydraulics:** The residence time between PAC dosing and filtration (typically < 1 h)
- **Filtration:** The total PAC residence time in the filter, that is, the average time between successive backwashing cycles (typically > 1 d)



# NORIT® Activated Carbon Purification for Living



**Helping our  
customers meet  
their specific  
purification  
needs**

Building on our greater than 100-year history of innovation in manufacturing and product development, NORIT Activated Carbon is the world's most experienced and one of the largest producers of activated carbon.

Our products are used to remove pollutants, contaminants and/or other impurities from water, air, food and beverages, pharmaceutical products and other liquids and gases in an efficient and cost-effective manner.

In addition to our unparalleled product portfolio, we offer a full range of activated carbon services including rental systems, carbon reactivation, bulk delivery and change-out, some types of carbon evaluation, as well as technical service and support to help our customers meet their specific purification needs.

We provide our customers with a worldwide network of sales and service support. In fact, we manufacture activated carbon and reactivate carbon in multiple plants around the world. So whether you have one operation or many facilities around the globe, we have you covered.

# NORIT

## ACTIVATED CARBON



**Our sales, technical service and customer service teams are well prepared to serve customers around the world.**

[www.norit.com](http://www.norit.com)



#### EMEA REGIONAL OFFICE

Norit Nederland B.V. Astronaut  
34  
3824 MJ Amersfoort  
THE NETHERLANDS  
T +31 33 464 8911  
E [info.emea@norit.com](mailto:info.emea@norit.com)

#### AMERICAS REGIONAL OFFICE

Norit Americas, Inc.  
3200 University Avenue  
Marshall, Texas 75670  
USA  
T +1 903 923 1000  
E [info.americas@norit.com](mailto:info.americas@norit.com)

#### ASIA/PACIFIC REGIONAL OFFICE

Norit Singapore Pte. Ltd.  
101 Thomson Road  
United Square #16-04  
Singapore 307591  
Singapore  
T +65 6631 9386  
E [info.ap@norit.com](mailto:info.ap@norit.com)

**Notice and Disclaimer.** The data and conclusions contained herein are based on work believed to be reliable, however, Norit cannot and does not guarantee that similar results and/or conclusions will be obtained by others. This information is provided as a convenience and for informational purposes only. No guarantee or warranty as to this information, or any product to which it relates, is given or implied. This information may contain inaccuracies, errors, or omissions and NORIT DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT OR (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Norit responsible for, and Norit does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.

NORIT® is a registered trademark of Norit B.V. and its affiliates.